



6J6

6J6

MEDIUM-MU TWIN TRIODE

MINIATURE TYPE

GENERAL DATA

Electrical:

Heater for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.45 amp

Direct Interelectrode Capacitances:

	Without External Shield	With External Shield ^o	
<i>Unit No. 1</i>			
Grid to plate.	1.6	1.5	$\mu\mu\text{f}$
Grid to cathode and heater	2.2	2.6	$\mu\mu\text{f}$
Plate to cathode and heater	0.4	1.6	$\mu\mu\text{f}$
<i>Unit No. 2</i>			
Grid to plate.	1.6	1.5	$\mu\mu\text{f}$
Grid to cathode and heater	2.2	2.6	$\mu\mu\text{f}$
Plate to cathode and heater	0.4	1.0	$\mu\mu\text{f}$


Characteristics, Class A₁ Amplifier (Each Unit):

Plate Voltage.	100	volts
Cathode-Bias Resistor [■]	50 $\diamond$	ohms
Amplification Factor	38	
Plate Resistance	7100	ohms
Transconductance	5300	μmhos
Plate Current.	8.5	ma

Mechanical:

Mounting Position.	Any
Maximum Overall Length	2-1/8"
Maximum Seated Length.	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip).	1-1-2" $\pm$ 3/32"
Maximum Diameter	3/4"
Bulb	T-5-1/2
Base	Small-Button Miniature 7-Pin (JETEC No. E7-1)
Basing Designation for BOTTOM VIEW	7BF

Pin 1 - Plate of
Unit No. 2
Pin 2 - Plate of
Unit No. 1
Pin 3 - Heater
Pin 4 - Heater



Pin 5 - Grid of
Unit No. 1
Pin 6 - Grid of
Unit No. 2
Pin 7 - Cathode

^o With external shield JETEC No. 316 connected to cathode.[■] Fixed-bias operation is not recommended. $\diamond$ Value is for both units operating at the specified conditions.

← Indicates a change.

MAR. 1, 1955

TUBE DIVISION

DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6J6



6J6

MEDIUM-MU TWIN TRIODE

AMPLIFIER - Class A₁

Values are for Each Unit

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE 300 max. volts

GRID VOLTAGE:

Positive bias value. 0 max. volts

PLATE DISSIPATION. 1.5 max. watts

→ PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode. . 100 max. volts

Heater positive with respect to cathode. . 100 max. volts

Maximum Circuit Values (For maximum rated conditions):

Grid-Circuit Resistance:

For cathode-bias operation 0.5 max. megohm

RF POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Key-down conditions per tube without modulation

Values are for Each Unit

Maximum Ratings, Design-Center Values:

DC PLATE VOLTAGE 300 max. volts

DC GRID VOLTAGE:

Negative bias value. -40 max. volts

→ Positive bias value. 0 max. volts

DC PLATE CURRENT 15 max. ma

DC GRID CURRENT. 8 max. ma

DC PLATE INPUT 4.5 max. watts

PLATE DISSIPATION. 1.5 max. watts

→ PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode. . 100 max. volts

Heater positive with respect to cathode. . 100 max. volts

Typical Push-Pull Operation at Frequencies up to 50 Mc:*

Values are for Both Units

DC Plate Voltage 150 volts

DC Grid Voltage:

From a fixed supply of -10 volts

From a grid resistor of 625 ohms

From a cathode resistor of 220 ohms

DC Plate Current 30 ma

DC Grid Current (Approx.)* 16 ma

Driving Power (Approx.)* 0.35 watt

Useful Power Output (Approx.). 3.5 watts

* Approximately 1.0 watt can be obtained when the 6J6 is used at 250 Mc as a push-pull oscillator with a plate voltage of 150 volts, with maximum rated plate dissipation, and with a grid resistor of 2000 ohms common to both units.

* For effect of load resistance on grid current and driving power, refer to *TUBE RATINGS-Grid Current and Driving Power* in the General Section.

→ Indicates a change.

MAR. 1, 1955

TUBE DIVISION


DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6J6

AVERAGE PLATE CHARACTERISTICS FOR EACH UNIT

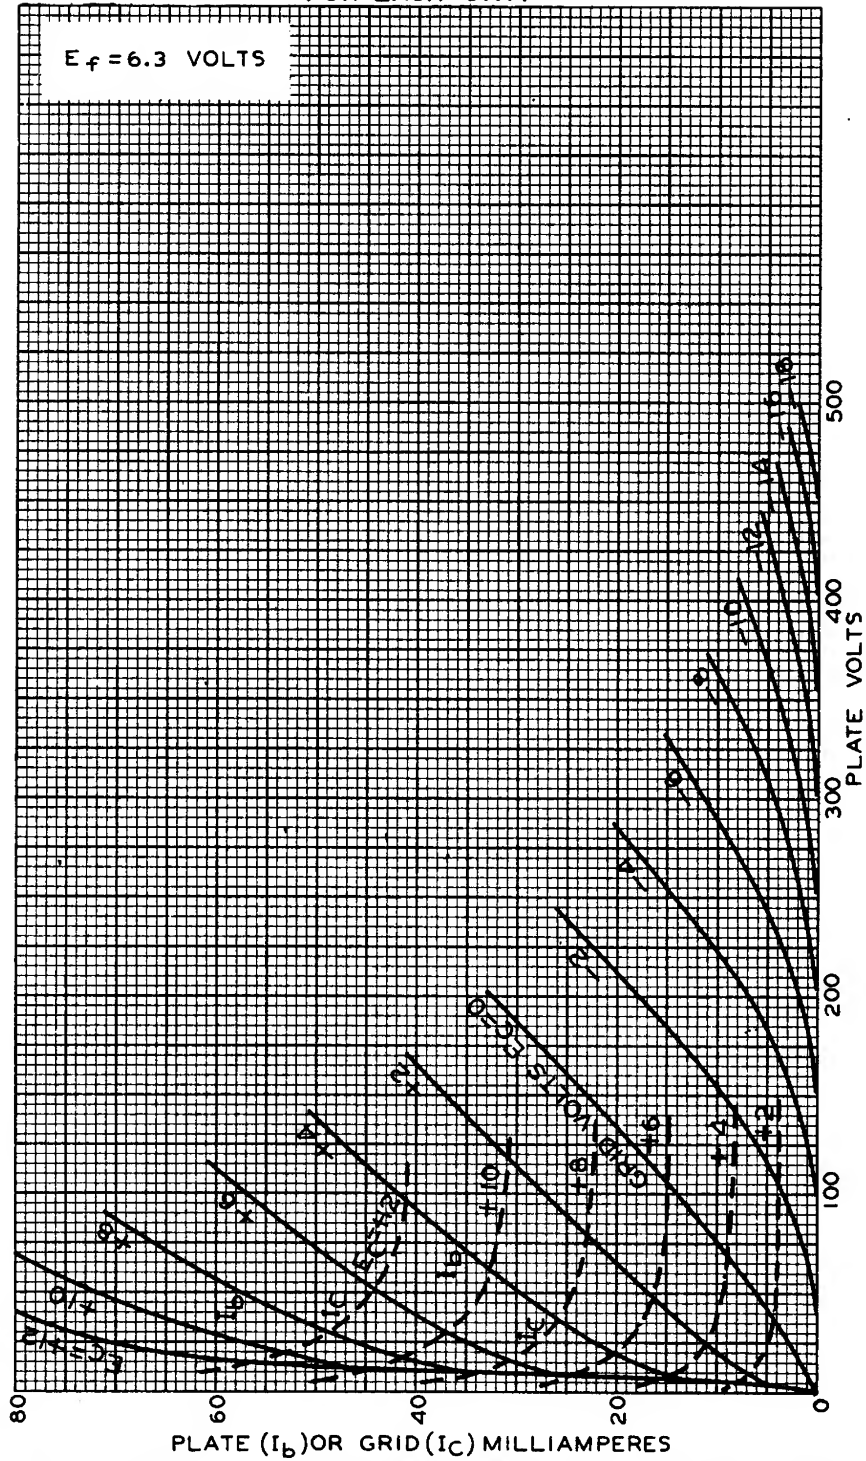

OCT. 21, 1944

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6403RI

6J6



6J6

AVERAGE PLATE CHARACTERISTICS FOR EACH UNIT

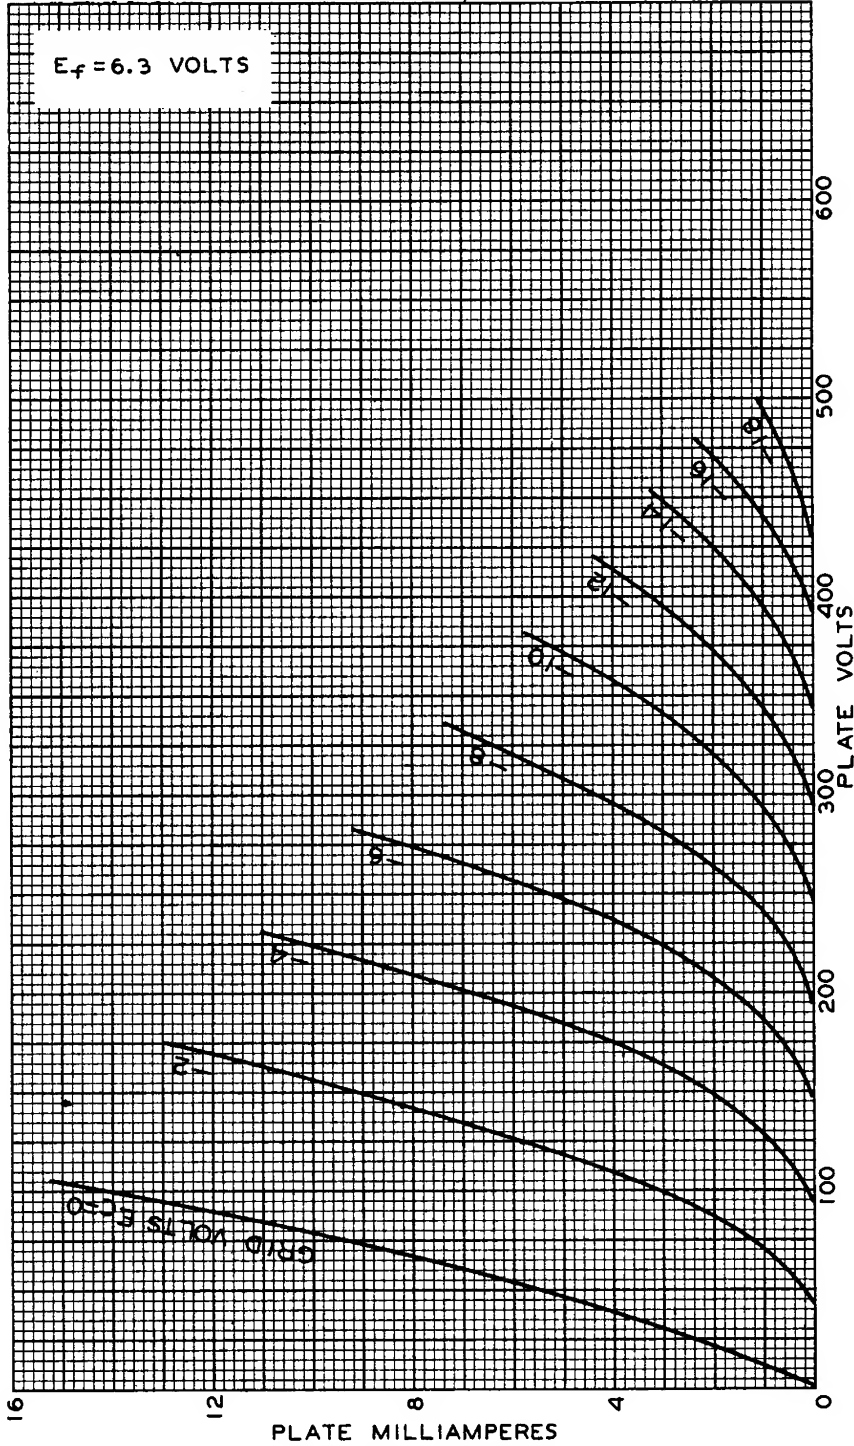

SEPT. 20, 1944

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6402R1



6J6

AVERAGE CHARACTERISTICS FOR EACH UNIT

6J6

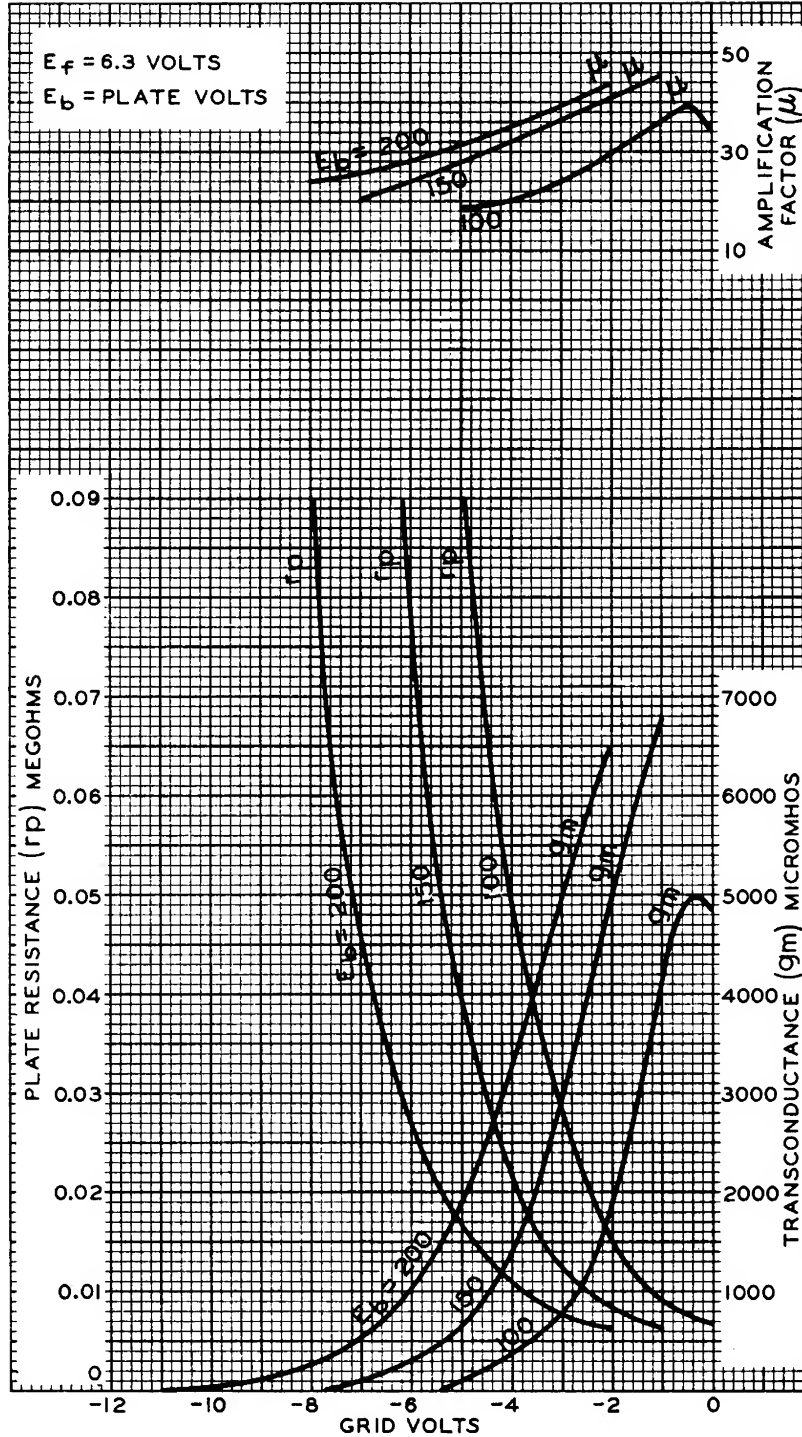

JUNE 28, 1951

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7672